



- 🛡️ Lift Safer
- ⚡ Lift Faster
- 🌱 Lift Greener

**HEAVY
DUTY**

⚠️ Load capacity
Max. 50 tons


⚠️ Imbalance capacity
Max. 15 tons



GANTERUD
L50
HEAVY DUTY
www.ganterud.se

GANTERUD
Lifting Solutions


1



GANTERUD
Lifting Solutions

**Ganterud L50
Heavy Duty**

Introducing the Ganterud L50 Heavy Duty: a precision levelling device for versatile and demanding applications. Discover the Ganterud L50 HD, a robust levelling device that combines both new and proven technology for new applications. This radio-controlled precision levelling device minimizes installation time and enhances safety, with a capacity of up to 50 tonnes.

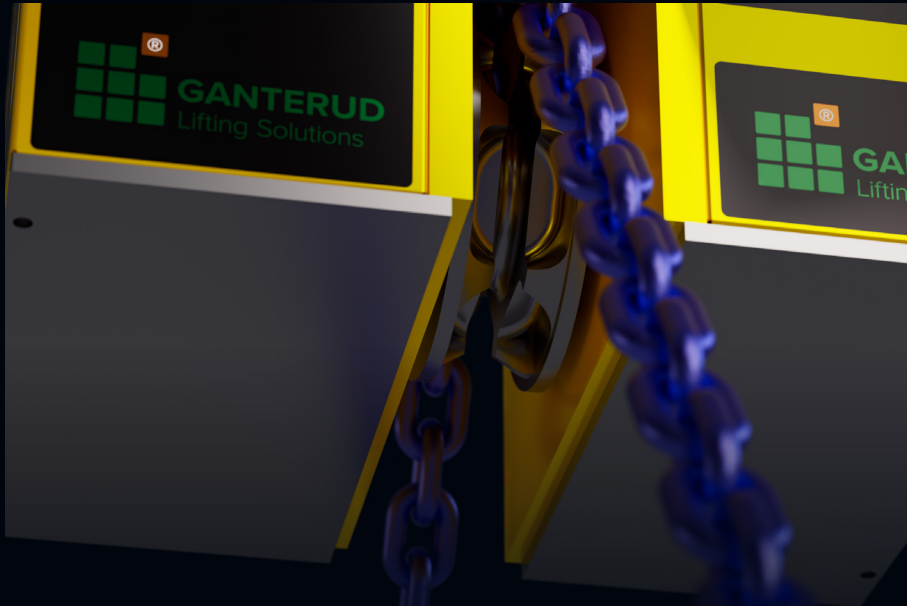

Handling both light and heavy loads with ease

The GANTERUD L50 HD levelling device combines both new and proven technology to handle loads efficiently and safely, accommodating objects from 0 to 50 tonnes.

Accurate and versatile object handling.

The GANTERUD L50 HD features a reversible chain of up to 3 meters per hook, ensuring precise and flexible levelling and handling for wide range of objects. The length of the chain can be adjusted as needed.

Enhanced productivity

The GANTERUD L50 HD improves productivity by enabling safe and easy object levelling at the push of a button, reducing both crane operation costs and downtime.

Built for tough conditions

With its robust and proven technology, the GANTERUD L50 HD delivers reliable performance in temperatures from -20°C to +40°C, making it ideal for demanding environments.

Minimal maintenance required

The sturdy casing, along with the IP65-rated electrical system, make the GANTERUD L50 HD easy to clean and highly resistant to dust and water.

Minimal service

The sturdy casing and IP65-rated electrical system allows for easy cleaning. Routine maintenance is limited to weekly battery charging depending on the use, with status conveniently displayed on the levelling device.



Safety factor


Minimum 4x safety factor on all load-bearing components.

Radio Control with emergency stop function

With its user-friendly, IP67-rated remote control, the GANTERUD L50 HD is easy and safe to operate.

Increases productivity many times over

The GANTERUD L50 HD levels lifted objects quickly and safely at the push of a button, reducing both costly crane time and downtime.

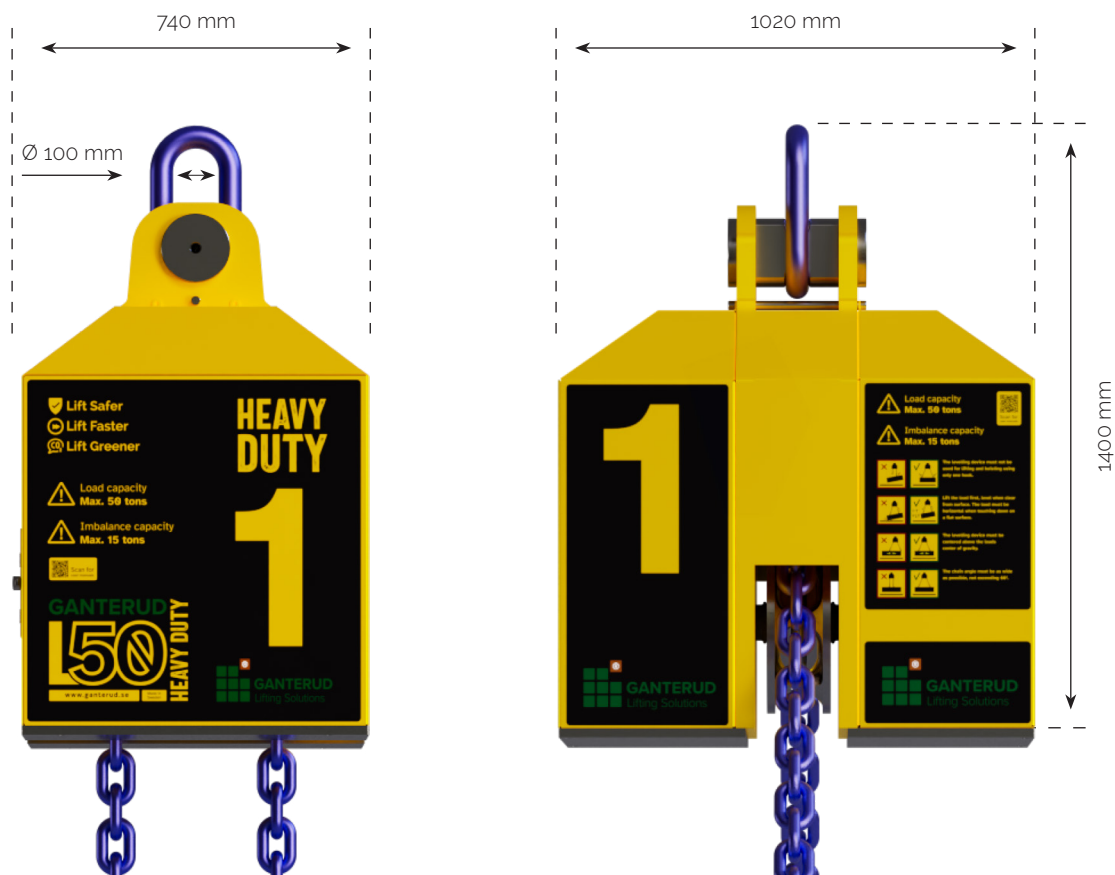

Technical data

- Load capacity: Max 50 tons
- Load imbalance capacity: <15 tons
- Max levelling length: 3 + 3 m
- Max chain angle: 60°
- Chain dimension: 32x96 mm
- Total chain length: 6 m

- Weight: 1400 kg
- Height: 1400 mm
- Width: 1020 mm
- Depth: 740 mm

Control system

- Radio range: 100 m unobstructed view
- Current electrical motor: 48 VDC
- Power at rest: 50 mA
- Power max continuous: 30 A
- Power peak: 60 A

Environmental requirements

- Operating temperature: -20°C - +40°C
- Storage temperature: -20°C - +45°C
- Relative Humidity (RH): 0 - 90 % during storage
- IP rating: Ip65

Hand - held controller with emergency stop function

- Number of function keys: 8
- Power output: 10 mW
- Power supply: 3x1.5v AAA
- Ip rating: Ip67

CERTIFICATION

- CE marked product

Optional extra equipment

Protective cover
Extended chain
Extra batteries

We reserve the right to alter specifications or designs without prior notification, and make reservation for any factual errors. Variations in specifications and equipment standards may occur between different geographical markets. Please contact us for more information regarding applicable product specifications and local adaptations.



Ganterud Lifting Solutions AB is a product company that develops and supplies effective, reliable and innovative lifting systems to facilitate the handling of materials and improve profitability, primarily within the construction and engineering sectors.

Dealer:



Ganterud Lifting Solutions AB
Frögatan 10
SE 653 43 Karlstad
Sweden
www.ganterud.se

Lagom design & produktion AB | www.lagomarbast.se